


LESS THAN 80' RIGHT OF WAY


* TABLE 1: MINIMUM SOIL CEMENT DENSITIES

SOIL CEMENT THICKNESS (IN.)	CEMENT (LBS./SQ. YD. PER IN. OF COMPACTED THICKNESS)	CEMENT (LBS./SQ. YD)
6"	7.05	42.3
8"	7.05	56.4
10"	7.05	70.5

* DENSITIES BASED ON 10% CEMENT CONTENT BY VOLUME.

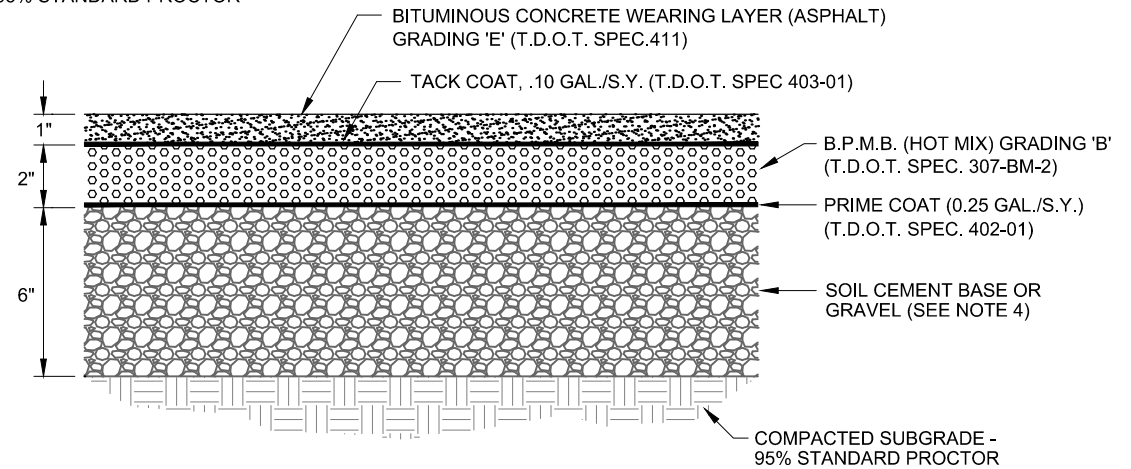

ALLEY SECTION

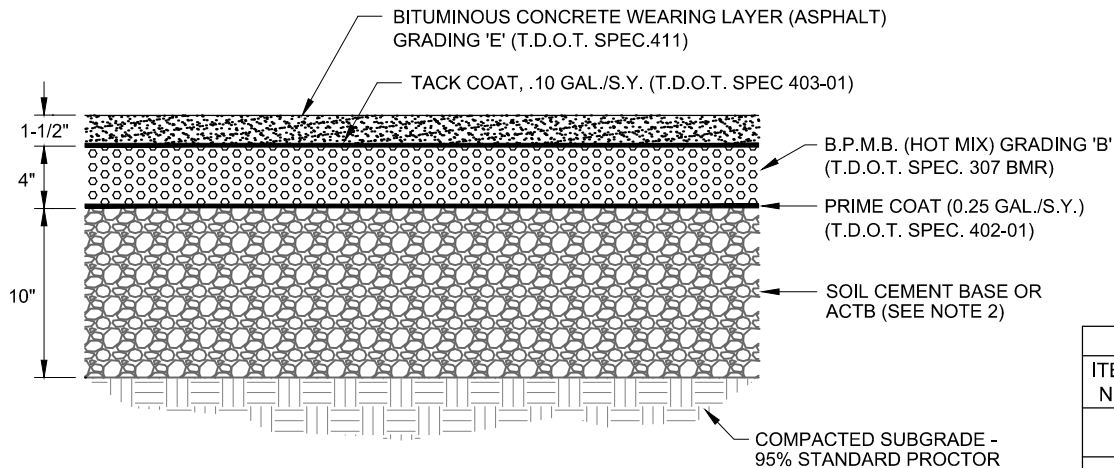

80' RIGHT OF WAY OR ABOVE

NOTES:

1. SHALL CONFORM WITH THE TOWN OF COLLIERVILLE STANDARD CONSTRUCTION SPECIFICATIONS, SECTION 02513 AND SECTION 02516.
2. EITHER 10" OF SOIL CEMENT (SEE TABLE 1) OR 10" OF ACTB. THE FINAL SECTION TO BE APPROVED BY TOWN ENGINEER PRIOR TO INSTALLATION.
3. EITHER 8" OF SOIL CEMENT (SEE TABLE 1) OR 8" OF GRAVEL.
4. EITHER 6" OF SOIL CEMENT (SEE TABLE 1) OR 8" GRAVEL.

REVISION		
ITEM NO.	DESCRIPTION OF CHANGE	APPROVAL DATE

**TOWN OF COLLIERVILLE
ASPHALT PAVEMENT
SECTION**

TOC-513