


**NOTES:**

1. 3 OR MORE CHIPS IN 8" LENGTH OF CURB - REPLACE SECTION.
2. ANY CHIP OVER 6" IN ANY DIMENSION - REPLACE SECTION.
3. VERTICAL DISPLACEMENT OF 1/4" OR MORE - REPLACE SECTION.
4. SKIN PATCHING OF FLATWORK WILL NOT BE PERMITTED.
5. REMOVE AND REPLACE ALL UNDERMINED CONCRETE AS DIRECTED BY CITY ENGINEER.

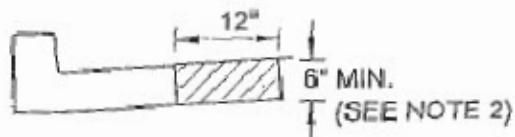

SECTION A-A  
N.T.S.

**NOTES:**

1. PRESERVE AC (STRAIGHT EDGE).
2. REMOVE AND REPLACE 6" MINIMUM THICK AC DEEP LIFT PATCH OR MATCH EXISTING, WHICHEVER IS GREATER.

REVISION		
ITEM NO.	DESCRIPTION OF CHANGE	APPROVAL DATE

TOWN OF COLLIERVILLE  
CURB, GUTTER & SIDEWALK  
REPAIR METHODS

TOC-518