



BASKETWEAVE PATTERN SHOWN  
(SEE PLANS FOR SPECIFIC PATTERN)

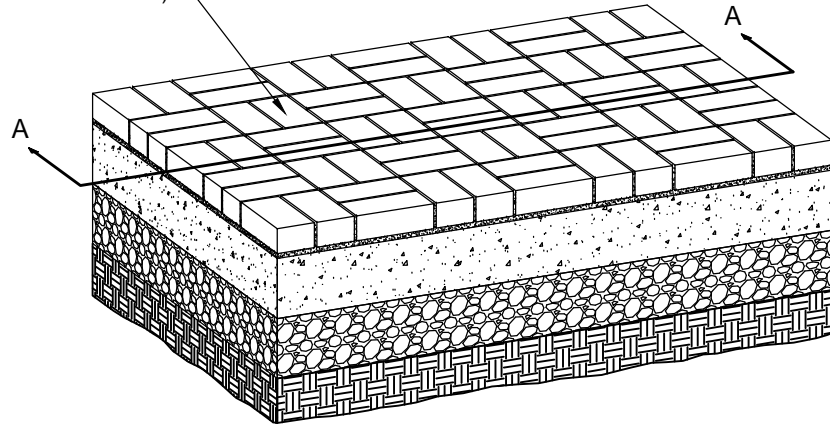

SEE PLANS FOR SPECIFIC PATTERN

#4 GRADE 60 REINFORCING STEEL  
EPOXY COATED @ 9" E.W.

2" CLEARANCE

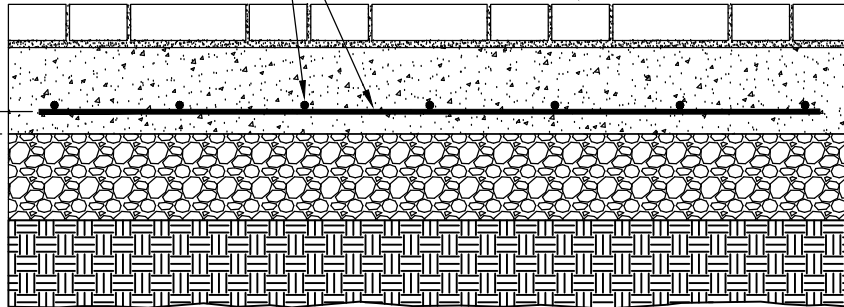

MORTARED BRICK PAVING (SEE NOTE 1)

3/8" TO 1/2" MORTAR SETTING BED (SEE NOTE 1)

MIN. 6" CONCRETE BASE (SEE NOTE 2)

MIN. 6" COMPACTED SUB-BASE (SEE NOTE 3)

COMPACTED SUBGRADE  
95% STANDARD PROCTOR

SECTION A-A

**NOTES:**

1. MORTAR TO BE TYPE S AS MODIFIED WITH ACRYLIC POLYMERS
2. CONCRETE TO BE CLASS P 5000 PSI HIGH EARLY STRENGTH CEMENT, 5-7% AIR-ENTRAINED
3. SUB-BASE TO BE TDOT 303-01 CRUSHED LIMESTONE

REVISION		
ITEM NO.	DESCRIPTION OF CHANGE	APPROVAL DATE

TOWN OF COLLIERVILLE  
MORTARED BRICK PAVING  
DETAIL

SCALE: NONE

TOC-542